

# DZS05(-F) Series

5W AC/DC Converter



## Features

- Wide input voltage: 85 ~ 264VAC (70 ~ 400VDC)
- Over current protection and short circuit protection
- High efficiency, High security isolation: 3000VAC
- Industrial design
- Ultra-Miniature package
- 90 degree curved series, minimizing product height
- Certificate UL60950/EN60950 standards

DZS05(-F) Series ----- are high efficiency green power modules with miniature packaging provided by ZimTec Electronics.

The series is featured by wide input voltage range, high efficiency, high reliability, low power consumption and safety isolation etc. They are widely used in industrial, official and civil equipments which have no special requirement for EMC performance. For harsh EMC environment, please refer to the EMC recommended circuits.

## SELECTION GUIDE

Approval	Model	Power	Output (Vo/Io)	Max. Capacitive Load ( $\mu$ F)	Ripple and Noise (Max.)	Efficiency (%) (230VAC, Typ.)	Standby Power (Max.)
UL (beside "-F")	DZS05-15B03S(-F)*	3.3W	3.3V/1000mA	2200	150mV	65	0.5W
	DZS05-15B05S(-F)	5W	5V/1000mA	1500	120mV	70	
	DZS05-15B09S(-F)		9V/560mA	680	120mV	72	
	DZS05-15B12S(-F)		12V/420mA	470	120mV	74	
	DZS05-15B15S(-F)		15V/340mA	330	120mV	75	
	DZS05-15B24S(-F)		24V/210mA	100	150mV	75	

Note:\* The model of 90 degrees of corner is with F. For example the DZS05-15B12S of 90 degrees of corner product is DZS05-15B12S-F.

## INPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC Input	85	--	264	V
	DC Input	100	--	400	
Input Frequency		47	--	440	Hz
Input Current	115VAC	--	--	0.2	A
	230VAC	--	--	0.1	
Inrush Current	115VAC	--	20	--	
	230VAC	--	30	--	
leakage Current	CY0 is 1nF/400VAC	--	--	0.25	mA


## OUTPUT SPECIFICATIONS

Item	Test Conditions	Min.	Typ.	Max.	Unit
Output Voltage Accuracy	DZS05-15B03S(-F)	--	±2.0	±3.0	%
	DZS05-15B05S(-F)	--	±1.0	±2.0	
	DZS05-15B09S(-F)	--			
	DZS05-15B12S(-F)	--			
	DZS05-15B15S(-F)	--			
	DZS05-15B24S(-F)	--			
Line Regulation	full load	--	±0.1	±0.5	%
Load Regulation	10% to 100%	--	±1.0	±1.5	
Ripple& Noise(p-p) (measuring refer to "RIPPLE AND NOISE MEASURE FIGURE")	20MHz bandwidth	--	50	150	mV


The information and specifications contained in this data sheet are believed to be correct at time of publication.  
However, ZimTec Electronics accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice.  
No rights under any patent accompany the sale of any such product(s) or information contained herein.



## PRODUCT TYPICAL CURVE

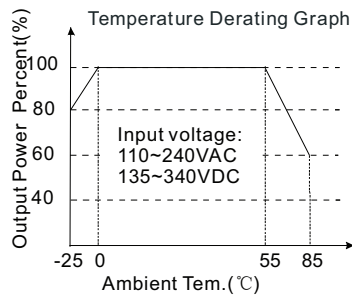


Note: When input 85~110VAC or 240~264VAC, it need to be voltage derated on basis of temperature derating.

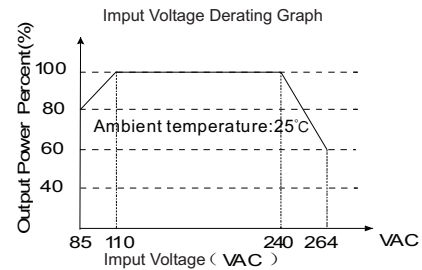


Note: When input DC, VDC=1.414\*VAC-20.


DZS05-15B12S(-F) AC input efficiency cure

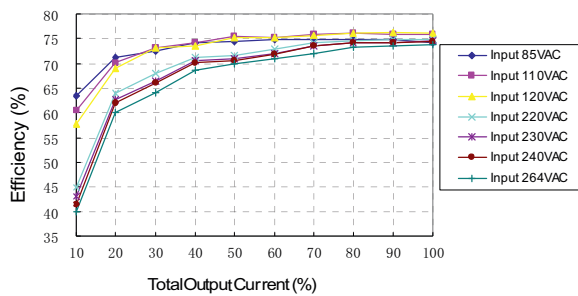


DZS05-15B12S(-F) DCinput efficiency cure

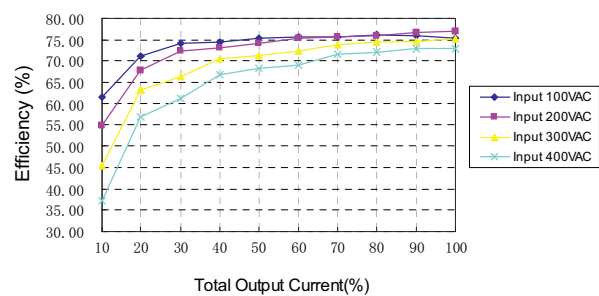


Efficiency VS Input Voltage curve (Full Load)

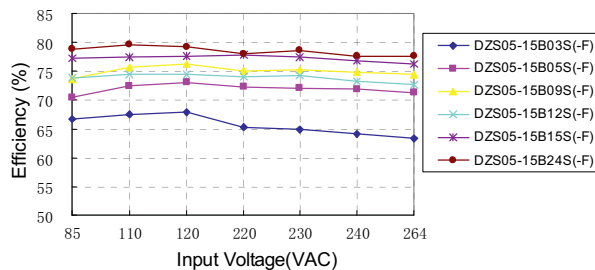


Efficiency VS Input Voltage curve (Full Load)

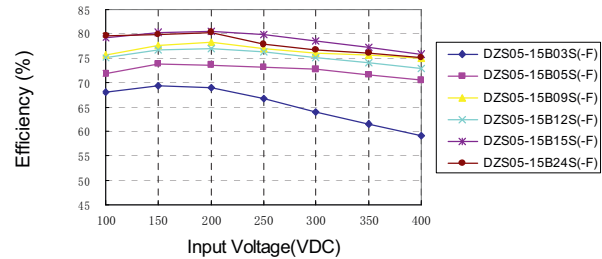


## STRUCTURE FIGURE

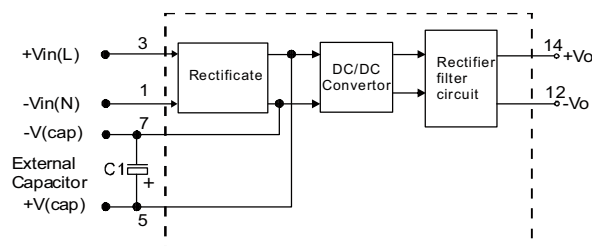

## TYPICAL APPLICATIONS

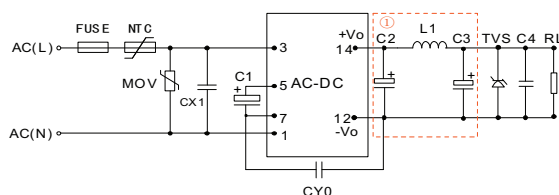

(Figure 1): Typical application circuit  
Note: ① is Pi filter circuit.

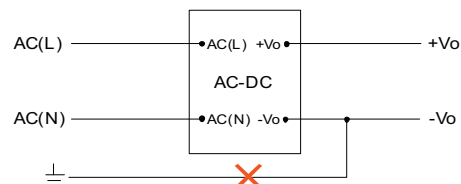


(Figure 2): Because of the surge protection, this application is not available for this series.

Note: If you have such application, please consult to our FAE department.

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to: [info@zimtec-electronics.de](mailto:info@zimtec-electronics.de)

## EMC RECOMMENDED CIRCUIT

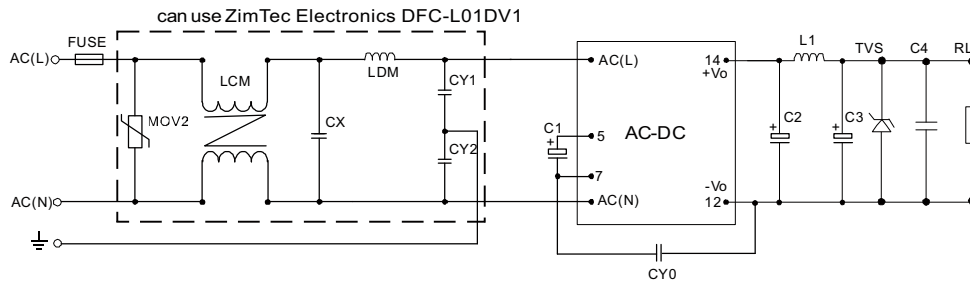

(Figure 3): Recommended circuit for applications which require higher EMC standard

## EMC RECOMMENDED CIRCUIT PCB LAYOUT

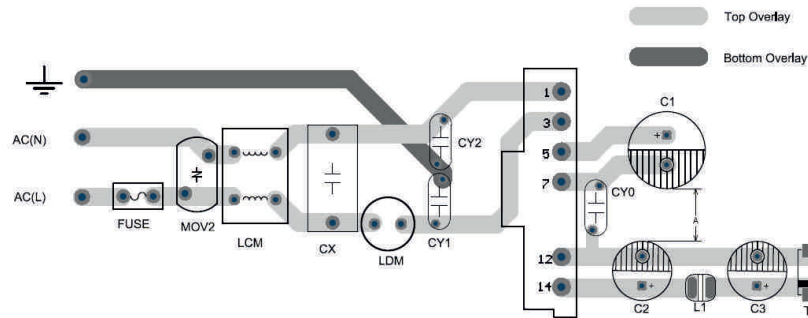


Figure 4: EMC application circuit PCB layout

Safety and recommend wiring: linewidth  $\geq 3\text{mm}$ , line-line distance  $\geq 6\text{mm}$ , line-ground distance  $\geq 6\text{mm}$ ,  $A \geq 6.4\text{mm}$

EXTERNAL CIRCUIT PARAMETERS									
Model	C1 (Required)	C2 (Required)	L1 (Required)	C3 (Required)	CX1	C4	CY0	FUSE (Required)	TVS
DZS05-15B03S(-F)	22μF/400V	470μF/10V	0.47uH	150μF/35 V	0.1μF/275V AC	100nF/50V	1nF/400 VAC	1A/250V	SMBJ7.0A
DZS05-15B05S(-F)		470μF/16V							
DZS05-15B09S(-F)		330μF/25V	1uH	150μF/35 V					SMBJ12A
DZS05-15B12S(-F)									SMBJ20A
DZS05-15B15S(-F)									
DZS05-15B24S(-F)									100μF/35V

Note:

1. C1, C2 and C3 are electrolytic capacitors. They are required both AC input and DC input.

When AC input, C1 is used as filter capacitor, the value of C1 is recommended to be 22 $\mu\text{F}$ /400V. When DC input, C1 is used as EMC filter capacitor, the value of C1 is recommended to be 10 $\mu\text{F}$ /400V (when the input voltage is above 370VDC, the recommended value of C1 is 10 $\mu\text{F}$ /450V). C2 and C3 are output filter capacitors, they are recommended to be high frequency and low impedance electrolytic capacitors. Capacitance and rated ripple current of capacitors refer to the datasheets provided by the manufactures. Voltage derating of capacitors should be 80% or above. C4 is a ceramic capacitor, which is used to filter high frequency noise. C2, C3 and L1 form a pi filter circuit. Current of L1 refer to the datasheets provided by the manufactures, current derating should be 80% or above. To protect post-circuits (if converter fails), TVS is recommended. And the external NTC thermistor is recommended to be 5D-9. External input MOV is recommended to use S14K350.


2. For standard EMC requirement, please refer to figure 1. If higher EMC requirement, please refer to figure 3, recommended parameters are shown in the table below.

Recommend Parameter For Higher EMC Standard Circuit	
Components	Recommend Parameter
MOV2	S10K300
CY1, CY2	1nF/400VAC
CX	0.1 $\mu\text{F}$ /275VAC
LCM	3.5mH
LDM	5mH
DFGL01DV1	ZimTec Electronics 1KV/2KV Surge protector
FUSE	1A/250V, slow blow, it must be connected to FUSE

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to: [info@zimtec-electronics.de](mailto:info@zimtec-electronics.de)

## DZS05-15BXXS DIMENSIONS, RECOMMENDED FOOTPRINT


### MECHANICAL DIMENSIONS

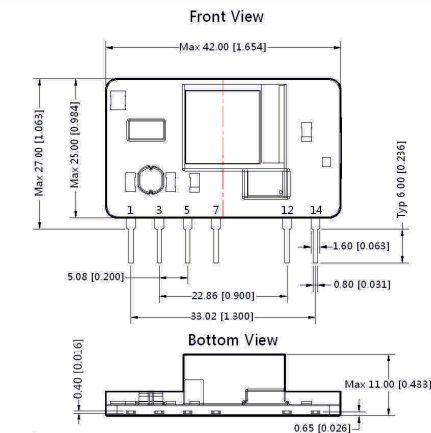


PIN CONNECTION	
Pin	Function
1	-Vin ( N )
3	+Vin ( L )
5	+V(cap)
7	-V(cap)
12	-Vo
14	+Vo

Note:  
Unit :mm[inch]  
Pin section tolerances : $\pm 0.1[\pm 0.004]$   
General tolerances : $\pm 0.50[\pm 0.020]$

- 1.It is necessary to add C1 between pin5 and pin7.
- 2.It is necessary to add Pi filter circuit to the output,such as the typical application of Figure 1.




### RECOMMENDED FOOTPRINT DETAILS



Note : Grid 2.54\*2.54mm


### PACKAGE DIAGRAM



Note:  
Unit :mm[inch]  
Inner carton dimensions: L\*W\*H=355\*192\*93  
Packaging quantity:70 pcs  
Outer carton dimensions: L\*W\*H=405\*380\*305  
Packaging quantity:420 pcs

## DZS05-15BXXS-F DIMENSIONS, RECOMMENDED FOOTPRINT


### MECHANICAL DIMENSIONS

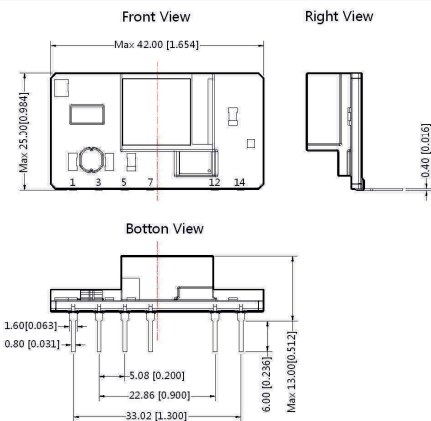


PIN CONNECTION	
Pin	Function
1	-Vin ( N )
3	+Vin ( L )
5	+V(cap)
7	-V(cap)
12	-Vo
14	+Vo

- 1.It is necessary to add C1 between pin5 and pin7 ;
- 2.It is necessary to add pi-type filter circuit to the output,such as the typical application of Figure 1,

Note:  
Unit :mm[inch]  
Pin section tolerances : $\pm 0.10[\pm 0.004]$   
General tolerances : $\pm 0.50[\pm 0.020]$




### RECOMMENDED FOOTPRINT DETAILS



Note:Grid 2.54\*2.54mm

### PACKAGE DIAGRAM



Note:  
Unit :mm[inch]  
Inner carton dimensions: L\*W\*H=365\*350\*105  
Packaging quantity : 280pcs  
Outer carton dimensions : L\*W\*H=390\*360\*245  
Packaging quantity: 560pcs

**ZimTec Electronics GmbH**

Franz-Mehring-Weg 2, 39606 Osterburg, Germany

E-mail : [info@zimtec-electronics.de](mailto:info@zimtec-electronics.de)

Web : [www.zimtec-electronics.de](http://www.zimtec-electronics.de)

Last Update : 18.May.2015