

D9 Series

20W 4:1 Regulated Single & Dual output

Features

- Ultra Wide 4:1 Input Range
- Full SMD Technology
- 1600 VDC Isolation
- No Minimum Load Required
- Efficiency up to 91%
- Extended Operating Temperature Range -40 ~ 85°C max.
- Adjustable Output Voltage
- Remote On/Off Control (CTRL)
- Continuous Short Circuit Protection
- Over Current Protection
- Over Voltage Protection
- Soft Start

The D9 series is a family of cost effective 20W single & dual output DC-DC converters. These converters combine nickle-coated copper package in a 2"x1" case with high performance features such as Active Clamp Technology, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 24 and 48 with output voltage of 3.3 , 5, 12, 15, ± 5 , ± 12 , ± 15 Vdc. High performance features include high efficiency operation up to 91% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS			
Output Voltage Accuracy		±1%	
Output Voltage Adjustability(Trim)		Single output: ±10%, max.	
Maximum Output Current		See table	
Line Regulation		±0.5%, max.	
Load Regulation(Io=0% to 100%)		Single: ±0.5%, max. Dual:±1%, max(balanced load)	
Cross Regulation (Dual Output) (1)		±5%	
Ripple&Noise (2)		75mVp-p, max.	
Over Voltage Protection (Zener diode clamp)	3.3V output	3.9V	
	5V output	6.2V	
	12V output	15V	
	15V output	18V	
	±5V output	±6.2V	
	±12V output	±15V	
	±15V output	±18V	
Over Current Protection		120% of FL, typ.	
Short Circuit Protection		Indefinite(hiccup) (Automatic Recovery)	
Temperature Coefficient		±0.02%/°C	
Capacitive Load (3)		See table	
Transient Recovery Time (4)		250us, typ.	
Transient Response Deviation(4)		±3%, max.	
INPUT SPECIFICATIONS			
Input Voltage Range		See table	
Under Voltage Lockout			
24V Models	Module ON / OFF	8.6Vdc / 7.9Vdc, typ.	
48V Models	Module ON / OFF	17.8Vdc / 16Vdc, typ.	
Start up Time		20mS, typ.	
(Nominal Vin and constant resistive load)			
Input Filter		Pi Type	
Input Current(No-Load)		See table, typ.	
Input Current(Full-Load)		See table, max.	
Input Reflected Ripple Current(5)		20mA _{p-p} , typ.	
Remote On/Off (CTRL)(6)			
ON: 3.0 ... 12Vdc or open circuit			
OFF: 0 ... 1.2Vdc or Short circuit pin2 and pin 6			
OFF idle current: 5 mA, typ			
ENVIRONMENTAL SPECIFICATIONS			
Operating Ambient Temperature		-40°C ~ +85°C(See Derating Curve) -40°C ~ +66°C(For 100% load)	
Maximum Case Temperature		105°C	
Storage Temperature		-55°C ~ +125°C	
Cooling		Nature Convection	



GENERAL SPECIFICATIONS		
Efficiency		See table, typ.
I/O Isolation Voltage(3 sec)		
Input/Output		1600Vdc
Case/Input & Output		1600Vdc
Isolation Resistance		1000 M Ohm , min.
Isolation Capacitance		1200 pF, typ.
Switching frequency		330kHz, typ.
Humidity		95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)		>560 khrs
Safety Standard		IEC/EN 60950-1
Safety Approvals		CB
EMC CHARACTERISTICS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions(7)	EN55022	CLASS A
ESD	IEC61000-4-2	Perf. Criteria A
RS	IEC61000-4-3	Perf. Criteria A
EFT(8)	IEC61000-4-4	Perf. Criteria A
Surge (8)	IEC61000-4-5	Perf. Criteria A
CS	IEC61000-4-6	Perf. Criteria A
PFMF	IEC61000-4-8	Perf. Criteria A
PHYSICAL SPECIFICATIONS		
Case Material		Nickel-coated Copper
Base Material		Non-conductive Black Plastic(UL94V-0 rated)
Pin Material		1.0mm Brass Solder-coated
Potting Material		Epoxy (UL94V-0 rated)
Weight		30.0g
Dimensions		2.00"x1.00"x0.40"
ABSOLUTE SPECIFICATIONS (9)		
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.		
Input Surge Voltage(100mS)		
24 Models		50 Vdc max.
48 Models		100 Vdc max.
Soldering Temperature		260°C max.
(1.5mm from case 10 sec. Max.)		

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, ZimTec Electronics accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.



D9 - 20W 4:1 Regulated Single & Dual output

PART NUMBER STRUCTURE

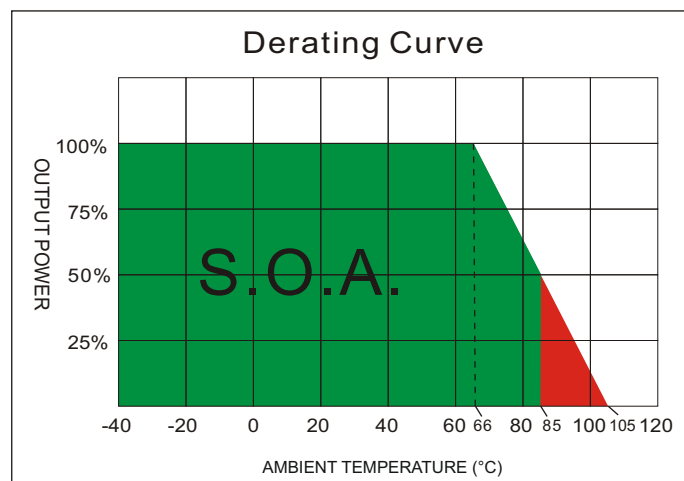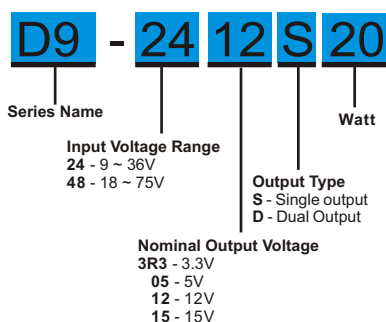

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
D9-243R3S20	9-36	50	879	3.3	0	5500	89	10000
D9-2405S20	9-36	50	957	5	0	4000	91	6800
D9-2412S20	9-36	22	980	12	0	1670	89	1000
D9-2415S20	9-36	22	968	15	0	1330	89	680
D9-483R3S20	18-75	30	440	3.3	0	5500	89	10000
D9-4805S20	18-75	30	473	5	0	4000	91	6800
D9-4812S20	18-75	15	484	12	0	1670	89	1000
D9-4815S20	18-75	15	484	15	0	1330	89	680
D9-2405D20	9-36	65	969	±5	0	±2000	89	±2200
D9-2412D20	9-36	25	980	±12	0	±835	88	±470
D9-2415D20	9-36	25	980	±15	0	±665	89	±330
D9-4805D20	18-75	40	484	±5	0	±2000	89	±2200
D9-4812D20	18-75	15	490	±12	0	±835	88	±470
D9-4815D20	18-75	15	490	±15	0	±665	89	±330

NOTE


- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within ±5%.
- Measured with 20MHz bandwidth and 1.0uF ceramic capacitor.
- Tested by minimal Vin and constant resistive load.
- Tested by normal Vin and 25% load step change (75%-50%-25% of Io).
- Measured Input reflected ripple current with a simulated source inductance of 12uH.
- The remote on/off control pin is referenced to -Vin(pin2).
- Input filter components (C1, C2, L) are used to help meet conducted emissions requirement for the module.
These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.
- An external filter capacitor is required if the module has to meet IEC61000-4-4 and IEC61000-4-5.
The filter capacitor ZimTec Electronics suggest: Nippon chemi-con KY series, 220uF/100V.
- Exceeding the absolute ratings of the unit could cause damage.

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : info@zimtec-electronics.de

TEST CONFIGURATIONS


Input Reflected Ripple Current Test Step

Input reflected ripple current is measured through a source inductor L_{in} (12 μ H) and a source capacitor C_{in} (47 μ F, ESR<1.0 Ω at 100KHz) at nominal input and full load.

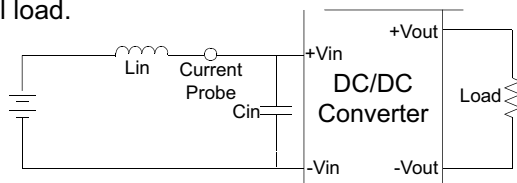

Output Ripple & Noise Measurement Test

Use a capacitor C_{out} (1.0 μ F) measurement. The Scope measurement bandwidth is 0-20MHz.

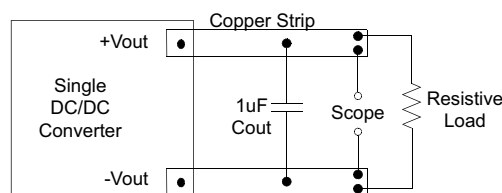


DESIGN&FEATURE CONFIGURATIONS

CTRL Module ON / OFF

Positive logic turns on the module during high logic And off during low logic.


Ctrl module on/off can be controlled by an external switch between the ctrl terminal and -Vin terminal. The switch can be an open collector or open drain

For positive logic if the ctrl feature is not used, please leave the ctrl pin floating.

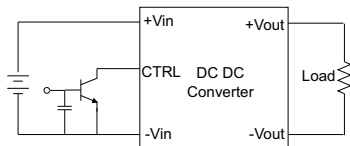





EMI Filter

Input filter components (C_1 , C_2 , L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.

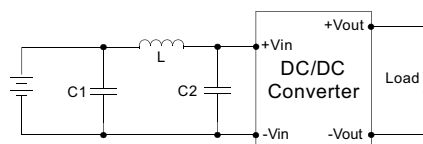


	C1	L	C2
D9-24XXXXX	1210, 2.2 μ F/100V	12 μ H	1210, 2.2 μ F/100V
D9-48XXXXX	1210, 2.2 μ F/100V	12 μ H	1210, 2.2 μ F/100V

ELECTRICAL CHARACTERISTIC CURVES

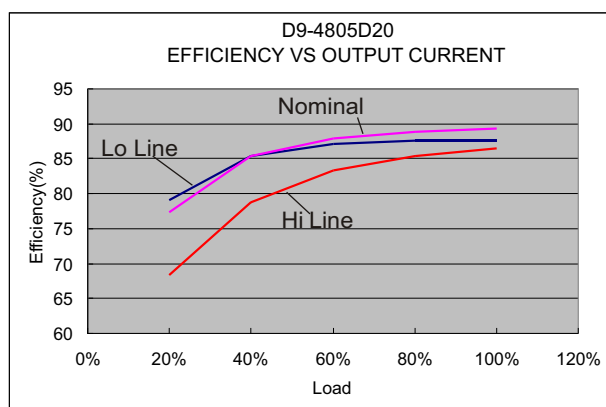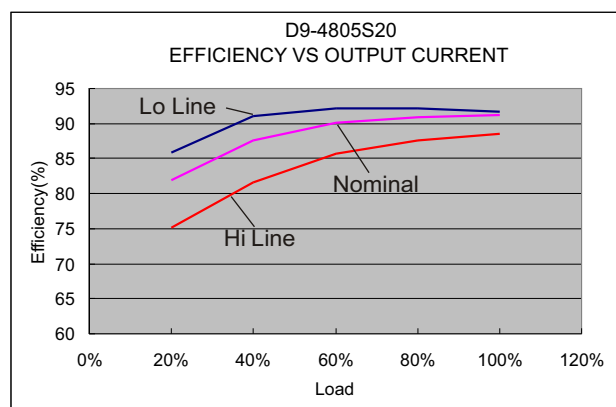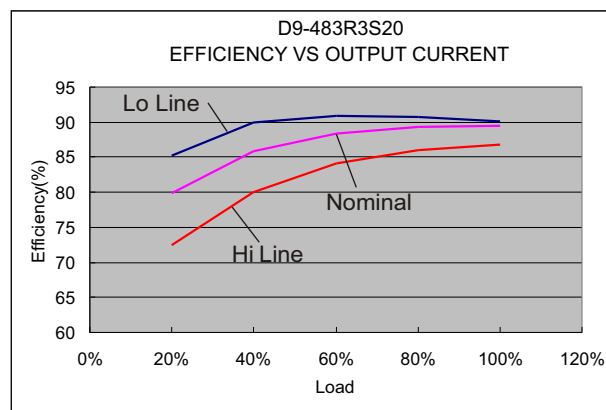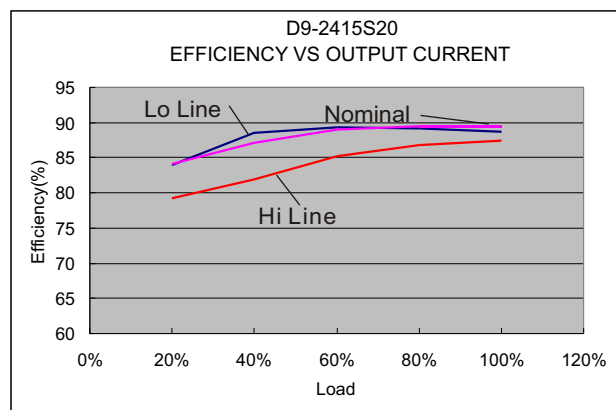

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : info@zimtec-electronics.de

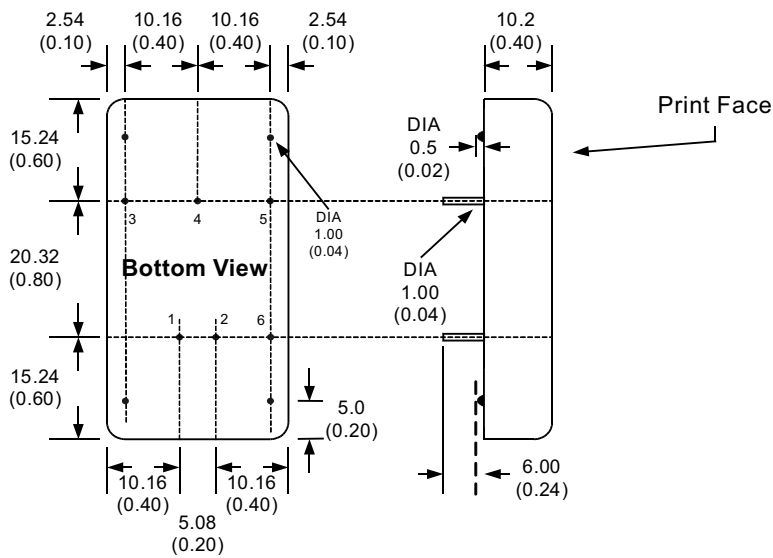MECHANICAL SPECIFICATIONS

All dimensions are typical in millimeters (inches).

1. Pin diameter: 1.0 ± 0.05 (0.04 ± 0.002)
2. Pin pitch and length tolerance: ± 0.35 (± 0.014)
3. Case Tolerance: ± 0.5 (± 0.02)
4. Stand-off tolerance: ± 0.1 (± 0.004)

PIN CONNECTIONS

PIN NUMBER	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
3	+Vout	+Vout
4	Trim	Com
5	-Vout	-Vout
6	CTRL	CTRL

EXTERNAL OUTPUT TRIMMING

Output can be externally trimmed by using the method as below. (single output models only)

