
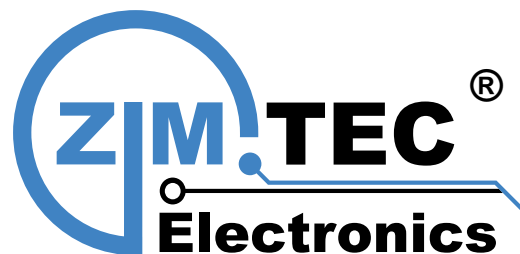


# DD-8W Series

8W 2:1 Regulated Single & Dual output

## Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation
- Continuous Short Circuit Protection
- Efficiency up to 85%
- -40 ~ 85°C Operation Temperature Range
- High Power Density: 8W in DIL-24 Package



The DD-8W series are a family of high performance 8W single & dual output DC/DC converters. These converters are consisted with nickel plated copper Dual in Line 24 pin package. The high performance features include: Synchronous Rectification, high efficiency and tight line/load regulation. Devices are encapsulated with high grade flameproof epoxy with UL94V-0 recognize. Input voltages of 12, 24 and 48 with output voltage of 3.3, 5, 12, 15,  $\pm 5$ ,  $\pm 12$ ,  $\pm 15$ . High performance features include high efficiency operation up to 85% and output voltage accuracy of  $\pm 1\%$  maximum.

All specifications typical at  $T_a = 25^\circ\text{C}$ , nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$
Line Regulation	$\pm 0.5\%$
Load Regulation (Single, $I_o = 0\%$ to $100\%$ )	$\pm 0.5\%$
(Dual, $I_o = 0\%$ to $100\%$ )	$\pm 1.0\%$
( $I_o = 0\%$ to $100\%$ , only 3.3V)	$\pm 1.5\%$
Cross Regulation (Dual Output) (1)	$\pm 5\%$
Over Current Protection	150% of FL, typ.
Ripple & noise (20 MHz bandwidth)(2)	75mV pk-pk
Short circuit protection	Indefinite(hiccup) (Automatic Recovery)
Temperature coefficient	$\pm 0.02\%/^\circ\text{C}$
Capacitor load(3)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current (4)	35mA pk-pk

GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(3 sec)	
Input/Output	1500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	1000 pF, typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	330kHz, typ.
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>0.91 Mhrs
Safety Standard : (designed to meet)	IEC 60950



EMC CHARACTERISTICS		
Radiated Emissions	EN55022	CLASS A
Conducted Emissions(7)	EN55022	CLASS A
ESD	EN61000-4-2	Perf. Criteria A
RS	EN61000-4-3	Perf. Criteria A
EFT(8)	EN61000-4-4	Perf. Criteria A
Surge (8)	EN61000-4-5	Perf. Criteria A
CS	EN61000-4-6	Perf. Criteria A
PFMF	EN61000-4-8	Perf. Criteria A

PHYSICAL SPECIFICATIONS	
Case Material	Nickel-coated Copper
Pin Material	0.5mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0-rated)
Weight	17.0g
Dimensions	1.25 "x0.8 "x0.4 "

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40 °C~85 °C(See Derating Curve) 40 °C~60 °C(For 100% load )
Maximum Case Temperature	100 °C
Storage Temperature	-40 °C~125 °C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS (9)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage(100mS)	
12 Models	25 Vdc, max.
24 Models	50 Vdc, max.
48 Models	100 Vdc, max.
Soldering Temperature	260 °C, max.
(1.5mm from case 10 sec. max.)	

## PART NUMBER STRUCTURE

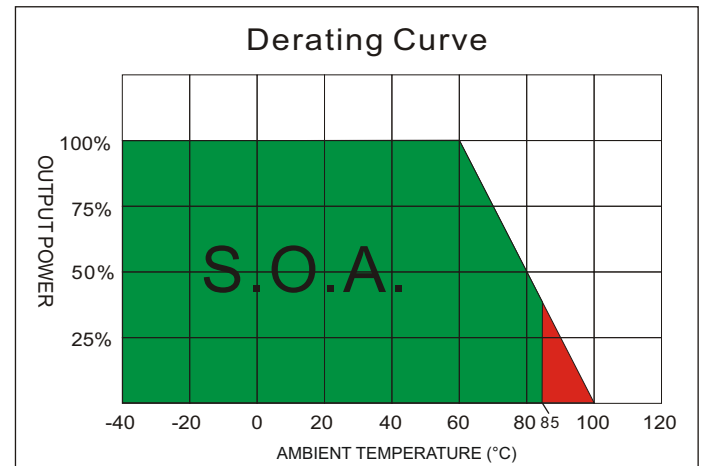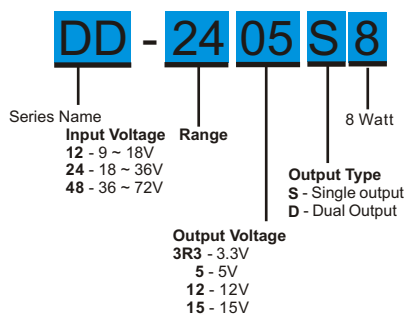


## MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
DD-123R3S8	9-18	20	687	3.3	0	2000	80	3300
DD-1205S8	9-18	20	762	5	0	1500	82	2200
DD-1212S8	9-18	20	784	12	0	665	85	470
DD-1215S8	9-18	20	803	15	0	535	83	220
DD-1205D8	9-18	20	813	±5	0	±800	82	±1000
DD-1212D8	9-18	20	794	±12	0	±335	84	±220
DD-1215D8	9-18	20	794	±15	0	±265	84	±100
DD-243R3S8	18-36	15	344	3.3	0	2000	80	3300
DD-2405S8	18-36	15	381	5	0	1500	82	2200
DD-2412S8	18-36	15	392	12	0	665	85	470
DD-2415S8	18-36	15	397	15	0	535	84	220
DD-2405D8	18-36	15	407	±5	0	±800	82	±1000
DD-2412D8	18-36	15	402	±12	0	±335	83	±220
DD-2415D8	18-36	15	392	±15	0	±265	85	±100
DD-483R3S8	36-72	15	172	3.3	0	2000	80	3300
DD-4805S8	36-72	15	191	5	0	1500	82	2200
DD-4812S8	36-72	15	198	12	0	665	84	470
DD-4815S8	36-72	15	198	15	0	535	84	220
DD-4805D8	36-72	15	203	±5	0	±800	82	±1000
DD-4812D8	36-72	15	196	±12	0	±335	85	±220
DD-4815D8	36-72	15	196	±15	0	±265	85	±100

## NOTE

- One load is 25% to 100% load, the other load is 100% load, the output voltage variable rate is within  $\pm 5\%$ .
- Ripple/Noise measured with a 1uF ceramic capacitor.
- Test by nominal input voltage and constant resistor load.
- Measured Input reflected ripple current with a simulated source inductance of 12uH.
- Operation under no-load and 10% conditions will not damage these devices, however they may not meet all listed specifications.
- It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.
- Input filter components (C1, L) are used to help meet conducted emissions requirement for the module. These components should be mounted as close as possible to the module; and all leads should be minimized to decrease radiated noise.
- An external filter capacitor is required if the module has to meet EN61000-4-4 and EN61000-4-5. The filter capacitor ZimTec Electronics suggest: Nippon - chemi - con KY series, 220uF/100V.
- Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.

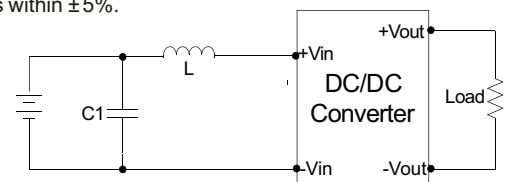


	C1	L
DVD-12 XXXXX	100uF, 100V	12uH
DVD-24 XXXXX	100uF, 100V	12uH
DVD-48 XXXXX	100uF, 100V	12uH



## TEST CONFIGURATIONS

**Input Reflected Ripple Current Test Step**


Input reflected ripple current is measured through a source inductor  $L_{in}$  (12 $\mu$ H) and a source capacitor  $C_{in}$  (47 $\mu$ F, ESR<1.0 $\Omega$  at 100KHz) at nominal input and full load.

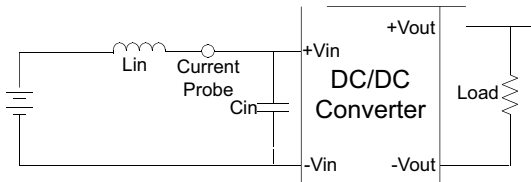**Output Ripple & Noise Measurement Test**


Use a capacitor  $C_{out}$  (1.0 $\mu$ F) measurement. The Scope measurement bandwidth is 0-20MHz.

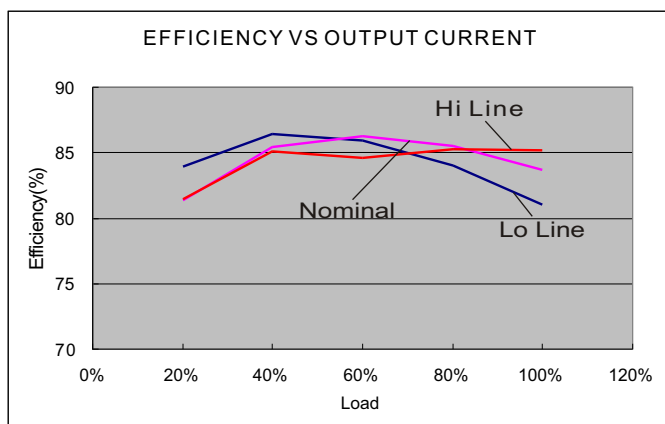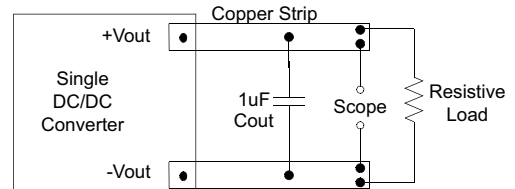


12 Models

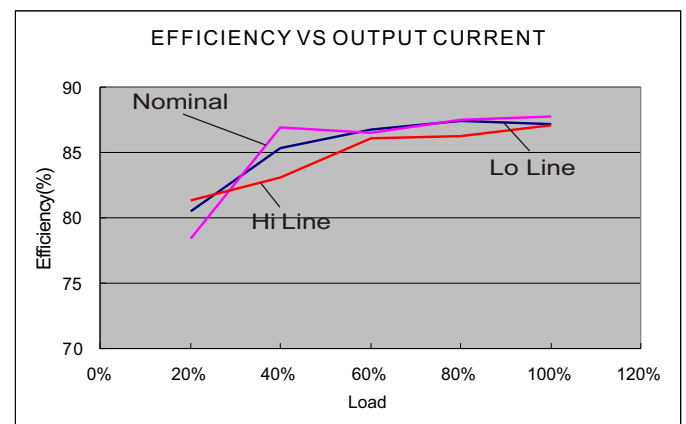

24 Models

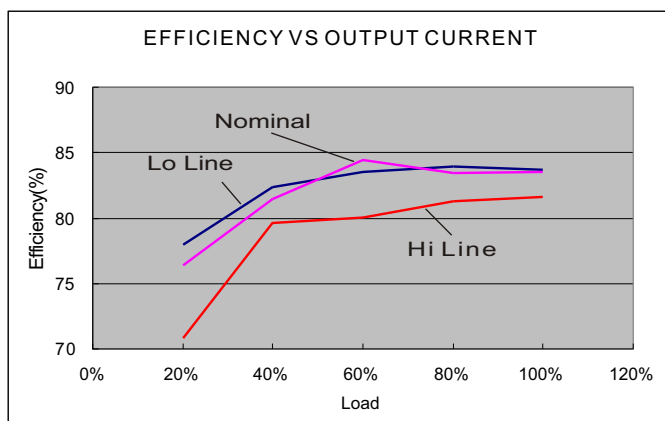

48 Models

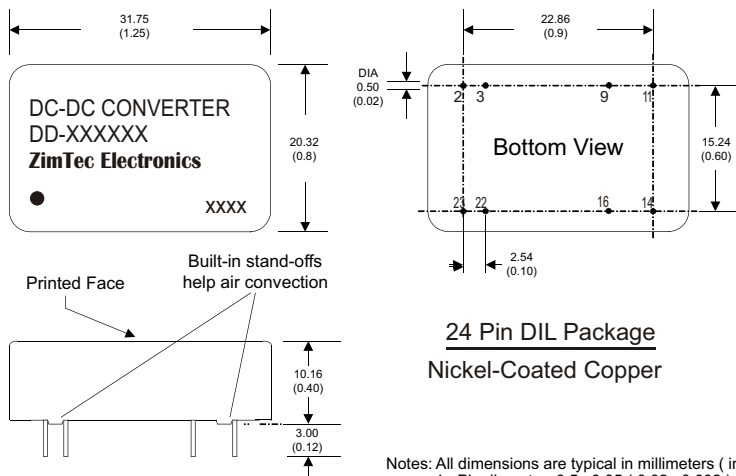**MECHANICAL SPECIFICATIONS**

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input