

FEATURES

- SIP package
- Efficiency up to 81%
- High power density
- No external component required
- Isolation voltage: 3K VDC
- Operating temperature range: -40°C to +105°C
- International standard pin-out
- continuous short circuit protection

DEZ_S1P & DFZ_S1P Series

1W, Fixed input voltage , isolated & unregulated

dual/single output

DEZ_S1P DFZ_S1P series is specially designed for applications where an isolated voltage is required in a distributed power supply system. It is suitable for

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
2. Where isolation is necessary between input and output (isolation voltage $\leq 3000VDC$);
3. Where do not has high requirement of line regulation, load regulation and low ripple noise;
4. Such as: pure digital circuits, low frequency analog circuits and relay-driven circuits.



Selection Guide

Certification	Part No.	Input Voltage (VDC)	Output		Efficiency (%Min./Typ.) @ Full Load	Max. Capacitive Load ^① (μF)
		Nominal (Range)	Output Voltage (VDC)	Output Current (mA) (Max./Min.)		
--	DEZ-0312-S1P	3.3 (2.97-3.63)	±12	±42/±5	72/76	100
	DFZ-0303-S1P		3.3	303/30	69/73	
	DFZ-0305-S1P		5	200/20	74/78	
	DFZ-0324-S1P		24	42/5	74/78	
UL/CE	DEZ-0505-S1P	5 (4.5-5.5)	±5	±100/±10	76/80	100
	DEZ-0509-S1P		±9	±56/±6	76/80	
	DEZ-0512-S1P		±12	±42/±5	76/80	
	DEZ-0515-S1P		±15	±33/±4	77/81	
	DEZ-0524-S1P		±24	±21/±2	77/81	
--	DFZ-0503-S1P		3.3	303/30	71/75	220
UL/CE	DFZ-0505-S1P		5	200/20	76/80	
	DFZ-0509-S1P		9	111/12	76/80	
	DFZ-0512-S1P		12	83/9	76/80	
	DFZ-0515-S1P		15	67/7	77/81	
	DFZ-0524-S1P		24	42/5	77/81	
--	DEF-0909-S1P	9 (8.1-9.9)	±9	±56/±6	76/80	100
	DFZ-0909-S1P		9	111/12	76/80	220
UL/CE	DEZ-1205-S1P	12 (10.8-13.2)	±5	±100/±10	76/80	100
	DEZ-1212-S1P		±12	±42/±5	77/81	
	DEZ-1215-S1P		±15	±33/±4	77/81	
	DEZ-1224-S1P		±24	±21/±2	76/80	
--	DFZ-1203-S1P		3.3	303/30	71/75	220
UL/CE	DFZ-1205-S1P		5	200/20	76/80	
	DFZ-1209-S1P		9	111/12	76/80	
	DFZ-1212-S1P		12	83/9	76/80	
	DFZ-1215-S1P		15	67/7	77/81	
	DFZ-1224-S1P		24	42/5	77/81	
--	DEZ-1505-S1P	15 (13.5-16.5)	±5	±100/±10	76/80	100
	DEZ-1515-S1P		±15	±33/±4	77/81	

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, ZimTec Electronics accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

CE	DFZ-1505-S1P		5	200/20	76/80	220
--	DFZ-1509-S1P		9	111/12	76/80	
	DFZ-1512-S1P		12	83/9	76/80	
CE	DFZ-1515-S1P		15	67/7	77/81	
UL/CE	DEZ-2405-S1P	24 (21.6-26.4)	±5	±100/±10	76/80	100
	DEZ-2409-S1P		±9	±56/±6	76/80	
	DEZ-2412-S1P		±12	±42/±5	77/81	
	DEZ-2415-S1P		±15	±33/±4	75/79	
	DEZ-2424-S1P		±24	±21/±2	76/80	
--	DFZ-2403-S1P		3.3	303/30	71/75	220
UL/CE	DFZ-2405-S1P		5	200/20	75/79	
	DFZ-2409-S1P		9	111/12	76/80	
	DFZ-2412-S1P		12	83/9	77/81	
	DFZ-2415-S1P		15	67/7	77/81	
	DFZ-2424-S1P		24	42/5	77/81	

Note: ①The capacitive loads of positive and negative outputs are identical.

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	3.3 VDC input	--	415/25	--	mA
	5 VDC input	--	274/20	--	
	9 VDC input	--	139/20	--	
	12 VDC input	--	114/15	--	
	15 VDC input	--	84/10	--	
	24 VDC input	--	58/7	--	
Surge Voltage (1sec. max.)	3.3 VDC input	-0.7	--	5	VDC
	5 VDC input	-0.7	--	9	
	9 VDC input	-0.7	--	12	
	12 VDC input	-0.7	--	18	
	15 VDC input	-0.7	--	21	
	24 VDC input	-0.7	--	30	
Input Filter		Capacitor filter			

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			See tolerance envelope graph (Fig. 1)			
Line Regulation	Input voltage change: ±1%	3.3 VDC output	--	--	±1.5	--
		Other output	--	--	±1.2	
Load Regulation	10%-100% load	3.3VDC output	--	18	--	%
		5VDC output	--	12	--	
		9VDC output	--	9	--	
		12VDC output	--	8	--	
		15VDC output	--	7	--	
		24VDC output	--	6	--	
Ripple & Noise*	20MHz bandwidth	The output voltage is 12VDC and under	--	30	--	mVp-p
		15VDC and 24VDC output voltage	--	60	--	
Temperature Drift Coefficient	100% load		--	--	±0.03	%/℃
Output Short Circuit Protection			--	--	1	s
	Others		Continuous, self-recovery			

Note: * Ripple and noise tested with "parallel cable" method, please see *DC-DC Converter Application Notes* for specific operation methods.

The models listed above is just for standard type. If you need the special specification product, please contact our service member by telephone presented in shortform cover or e-mail to : info@zimtec-electronics.de

General Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Isolation Voltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA	3000	--	--	VDC
Isolation Resistance	Input-output, isolation voltage 500VDC	1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V	--	20	--	pF
Operating Temperature	Derating if the temperature $\geq 85^{\circ}\text{C}$ (see Fig. 2)	-40	--	105	$^{\circ}\text{C}$
Storage Temperature		-55	--	125	
Casing Temperature Rise	Ta=25 $^{\circ}\text{C}$	--	25	--	$^{\circ}\text{C}$
Pin Welding Resistance Temperature	Welding spot is 1.5mm away from the casing, 10 seconds	--	--	300	
Storage Humidity	Non-condensing	--	--	95	%
Switching Frequency	100% load, nominal input voltage	--	100	300	KHz
MTBF	MIL-HDFK-217F@25 $^{\circ}\text{C}$	3500	--	--	K hours





Physical Specifications



Casing Material	Black flame-retardant heat-proof epoxy resin (UL94-V0)
Package Dimensions	19.50*6.00*9.30 mm
Weight	2.40g(Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	Conducted disturbance	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)		
	Radiated emission	CISPR22/EN55022	CLASS B (see Fig. 4 for recommended circuit)		
EMS	Electrostatic discharge	DEZ_S1P	IEC/EN61000-4-2	Contact $\pm 6\text{KV}$	perf. Criteria B
		DFZ_S1P	IEC/EN61000-4-2	Contact $\pm 8\text{KV}$	perf. Criteria B

Product Characteristic Curve

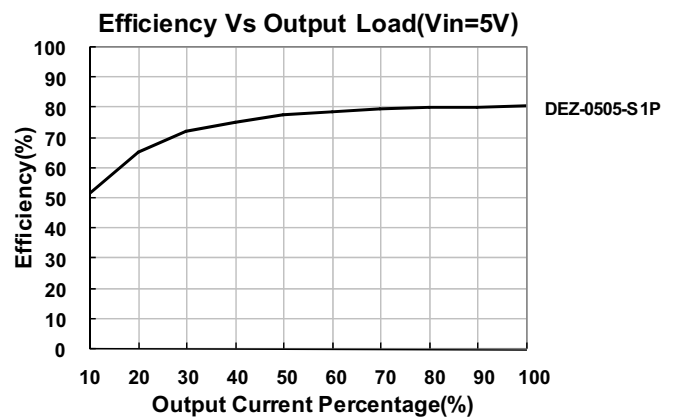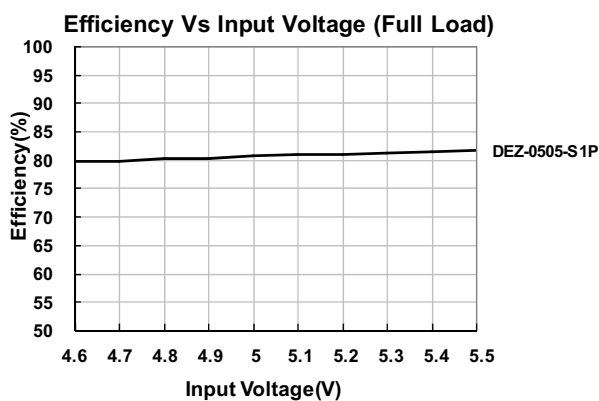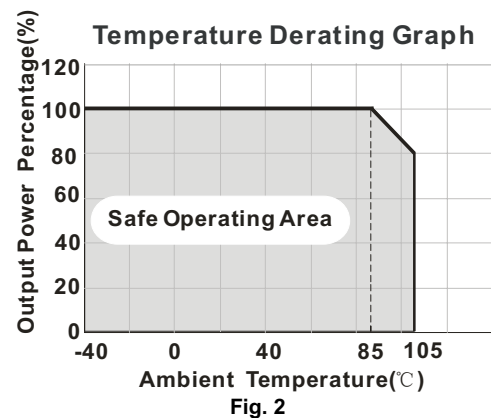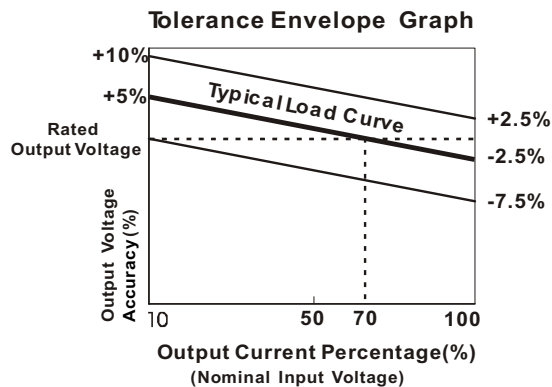

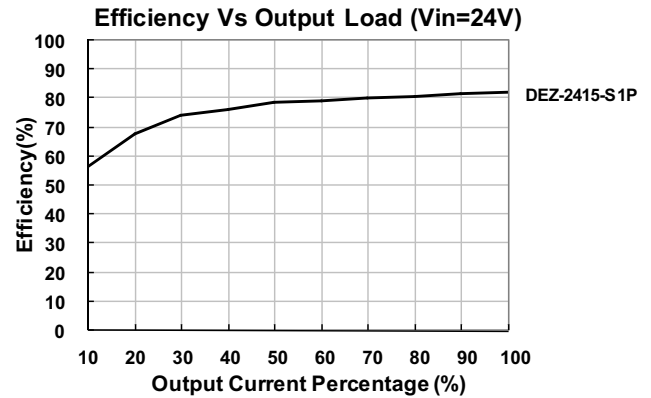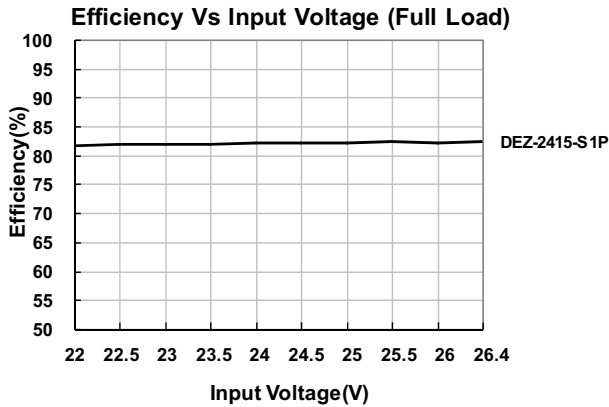

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

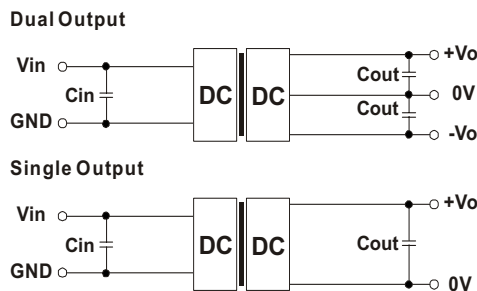


Fig.3

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin (μF)	Single output (VDC)	Cout (μF)	Dual output (VDC)	Cout (μF)
3.3/5	4.7	3.3/5/9	10	±3.3/±5	4.7
12	2.2	12	2.2	±12	1
15	2.2	15/24	1	±15/±24	0.47
24	1	--	--	--	--

It is not recommended to connect any external capacitor when output power is less than 0.5W.

2. EMC typical recommended circuit (CLASS B)

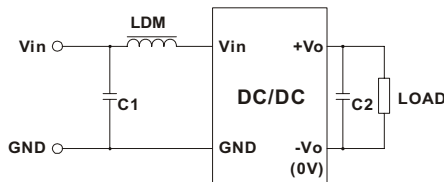


Fig. 4


Input voltage(VDC)		3.3/5/9/12/15/24
EMI	C1	4.7μF /50V
	C2	Refer to the Cout in Fig.3
	LDM	6.8μH

Note: It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--"

3. Output load requirements

To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.

4. For more information please find the application notes on www.zimtec-electronics.de

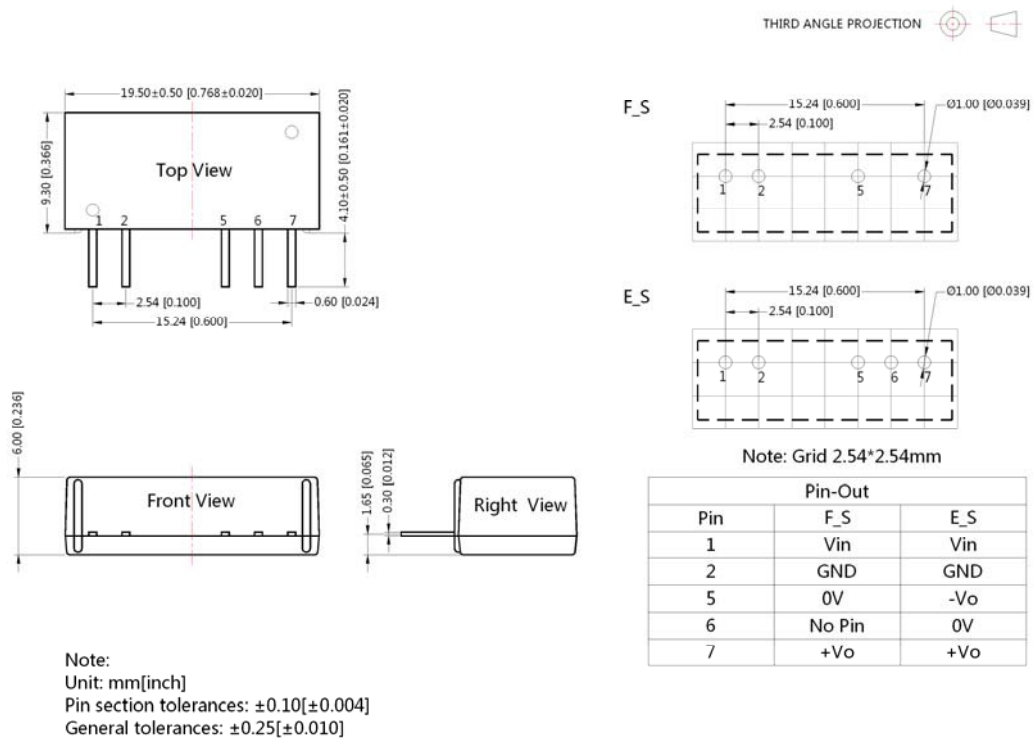

Notes:

1. If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in this datasheet;
2. The max. capacitive load should be tested within the input voltage range and under full load conditions;
3. Unless otherwise specified, data in this data sheet should be tested under the conditions of T_a=25°C, humidity<75% when inputting nominal voltage and outputting rated load;
4. All index testing methods in this datasheet are based on our Company's corporate standards;
5. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
6. We can provide product customization service;
7. Specifications of this product are subject to changes without prior notice.

ZimTec Electronics GmbH

Franz-Mehring-Weg 2, 39606 Osterburg, Germany

E-mail: info@zimtec-electronics.de

Web: www.zimtec-electronics.de

Last Update: 18.May.2015