

DKZ78XX-1500(L) Series

**WIDE INPUT NON-ISOLATED & REGULATED
SINGLE OUTPUT**



FEATURES

- Efficiency up to 95%, No heatsink required
- 1.5A large current output
- Operating temperature : -40°C ~ +85°C
- Short circuit protection, thermal shutdown
- Low ripple and noise
- Micro miniature SIP package, meet UL94-V0 requirement
- Ultra low power loss
- Industry standard pinout
- Pin-out compatible with LM78XX Linear
- MTBE>2000,000Hours

PRODUCT PROGRAM

Part Number	Input Voltage(VDC)		Output		Efficiency (%) (Typ)	
	Nominal	Range	Voltage (VDC)	Current (mA)	Vin (min.)	Vin (max.)
DKZ-7801-1500(L)	12	4.75-18	1.5	1500	83	78
DKZ-78X2-1500(L)	12	4.75-18	1.8	1500	85	81
DKZ-7802-1500(L)	12	4.75-18	2.5	1500	88	85
DKZ-7803-1500(L)	12	4.75-18	3.3	1500	91	88
DKZ-7805-1500(L)	12	6.5-18	5	1500	93	91
DKZ-78X6-1500(L)	12	8-18	6.5	1500	95	93

Add suffix "L" for 90° bend pins, for example: DKZ-7805-1500L

APPLICATIONS

Upgraded DKZ-78XX-1500(L) series switching regulators are ideal replacement for DKZ78XX linear regulators and LDO's. The efficiency of up to 95% means that very little energy is wasted as heat so there is no need for any heat sinks with their additional space and mounting costs. They are widely used in industrial control, instrumentation and electric power applications.


OUTPUT SPECIFICATIONS

Item	Test conditions	Min.	Typ.	Max.	Units
Output voltage accuracy	100% full load, input voltage range		±2	±3	%
Line regulation	Vin=min. to max, at full load		±0.5	±0.75	
Load regulation	10% to 100% load		±0.5	±1.0	
Ripple & Noise*	20MHz bandwidth (refer to figure 6)		20	45	mVp-p
Short circuit input power			0.5	1.8	W
Short circuit protection		Continuous, auto-recovery			
Thermal shutdown	Internal IC junction		150		°C
Output current limit			5000		mA
Switching frequency	Full load, input voltage range	300	340	380	KHz
Quiescent current			5	10	mA
Temperature coefficient	-40°C ~ +85°C ambient			±0.02	%/°C
Max capacitance load				1000	µF

*Test ripple and noise by "parallel cable" method.

MODEL SELECTION

DKZ-7805-1500(L)

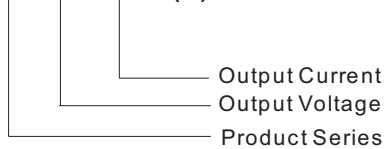


COMMON SPECIFICATIONS

Operating temp. range	-40~+85 °C (above 71°C power derating)	
Operating case temp.	+100 °C (max)	
Storage temp. range	-55~+125 °C	
Cooling	Free air convection	
Lead temperature**	300 °C (max)	
Storage humidity range	≤ 95%	
Case material	Plastic(UL94-V0)	
MTBF	> 2000k hours (25°C, MIL-HDBK-217F)	
Weight	4.0g	
Conducted emissions (Refer to Figure 5)	EN55022	CLASS B
Radiated emissions	EN55022	CLASS B
ESD	EN61000-4-2 Level 3 6kV/8kV perf. Criteria B	

**1.5mm from case for 10 seconds

TYPICAL CHARECTERISTICS

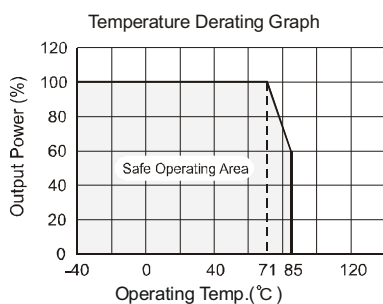


(Figure 1)

EXTERNAL CAPACITOR TABLE

Part Number	C1 (Ceramic capacitor)	C2 (Ceramic capacitor)
DKZ-7801-1500(L)	10 μ F/25V	22 μ F/6.3V
DKZ-78X2-1500(L)	10 μ F/25V	22 μ F/6.3V
DKZ-7802-1500(L)	10 μ F/25V	22 μ F/6.3V
DKZ-7803-1500(L)	10 μ F/25V	22 μ F/6.3V
DKZ-7805-1500(L)	10 μ F/25V	22 μ F/16V
DKZ-78X6-1500(L)	10 μ F/25V	22 μ F/16V

TYPICAL APPLICATION CIRCUIT

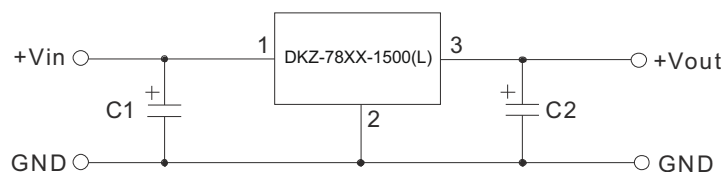


(Figure 2)

Note:


1. C1 and C2 are required and should be fitted close to the converter pins.
2. The capacitance of C1 and C2 sees external capacitor table, it can be increased properly if required and tantalum or low ESR electrolytic capacitors may also suffice.
3. No parallel connection or plug and play.

INPUT FILTER CIRCUIT CONNECT

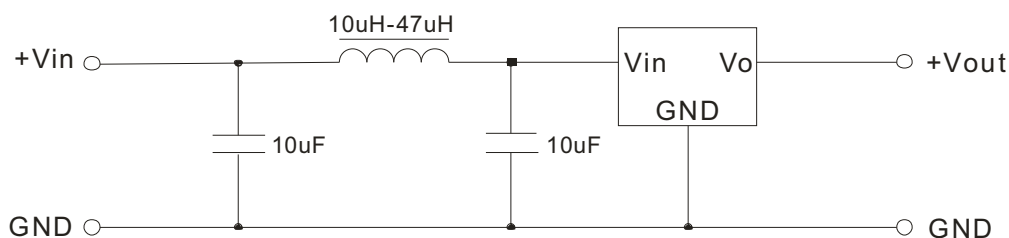


(Figure 3)

OUTPUT FILTER CIRCUIT CONNECT

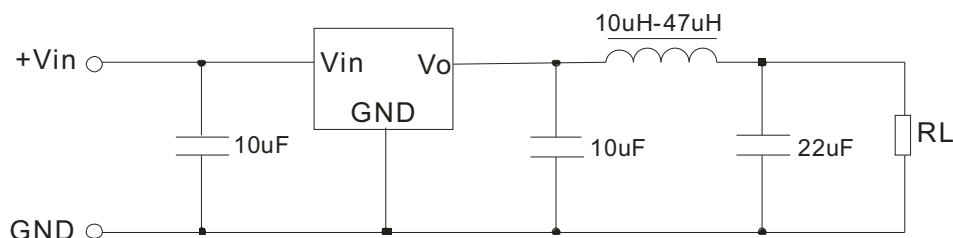

(Figure 4)


EMC RECOMMENDED CIRCUIT

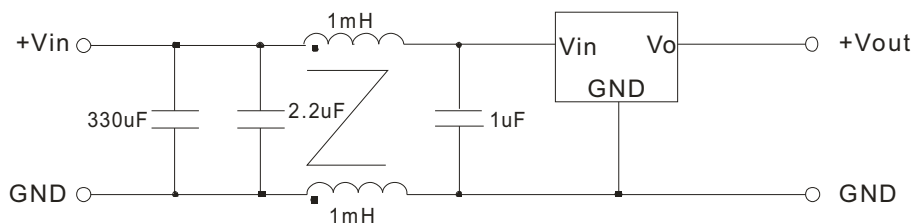

(Figure 5)


TEST CONFIGURATIONS (TA=25°C)

1 Efficiency and Output Voltage Ripple Test

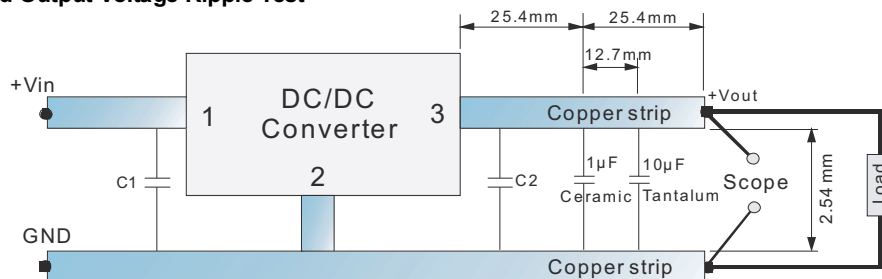





(Figure 6)

2 Start-up and Load Transient Response Test

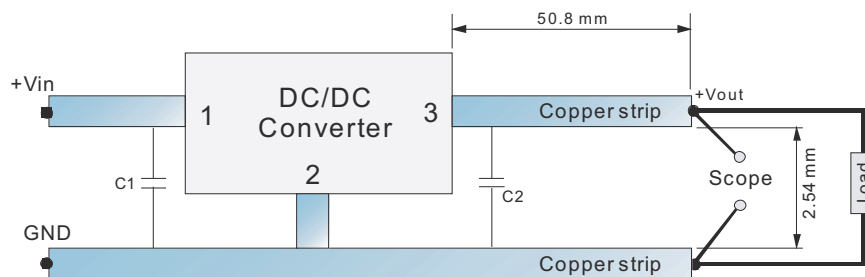

(Figure 7)


CHARACTERISTICS CURVE

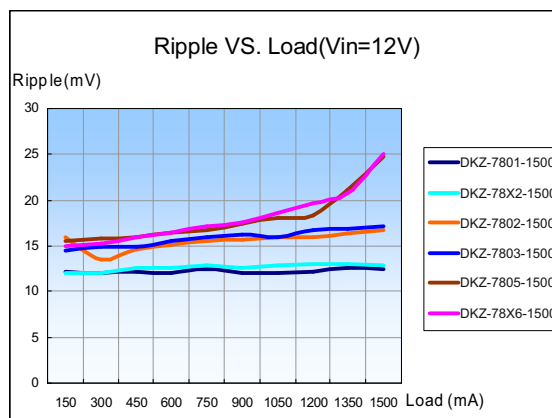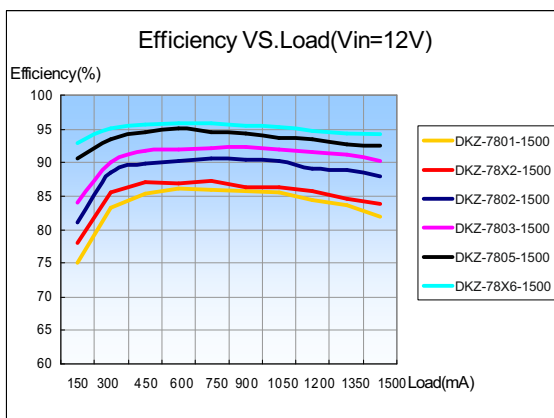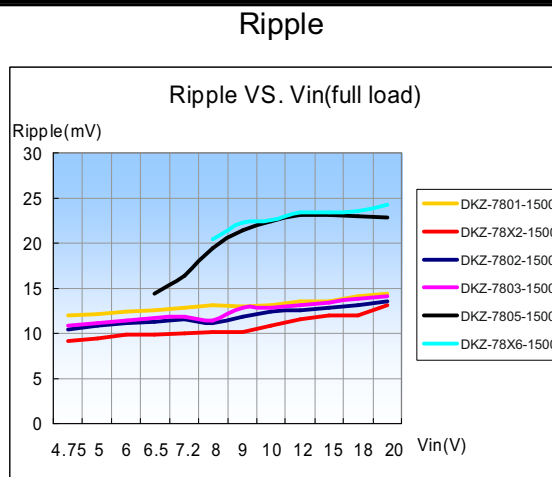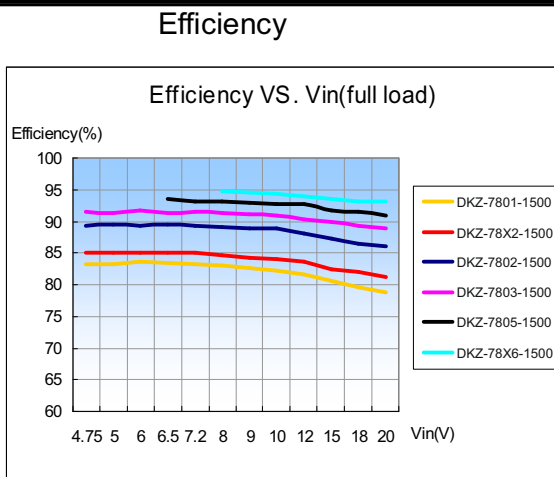


OUTLINE DIMENSIONS & FOOTPRINT DETAILS

MECHANICAL DIMENSIONS

DKZ-78XX

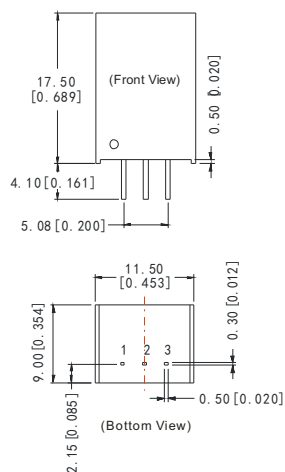

DKZ-78XX-L

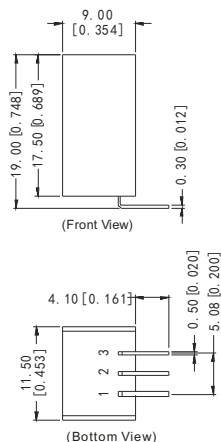

FOOTPRINT DETAILS	
Pin	Function
1	+Vin
2	GND
3	+Vout

Note:


Unit:mm[inch]

Pin section tolerances: $\pm 0.10\text{mm} [\pm 0.004\text{inch}]$


General tolerances: $\pm 0.25\text{mm} [\pm 0.010\text{inch}]$

RECOMMENDED FOOTPRINT

DKZ-78XX




DKZ-78XX-L




Note: grid 2.54*2.54mm.

TUBE OUTLINE DIMENSIONS

DKZ-78XX



DKZ-78XX-L



Note:

Unit:mm[inch]

General tolerances: $\pm 0.50\text{mm} [\pm 0.020\text{inch}]$

L=530mm[20.866inch] Devices per tube quantity: 44pcs

L=220mm[8.661inch] Devices per tube quantity: 17pcs

Short tube inner packaging dimensions: L*W*H=255*170*80mm

Short tube outer packaging dimensions(with six inner packaging boxes): L*W*H=375*280*270mm

Long tube inner packaging dimensions: L*W*H=580*200*100mm

Long tube outer packaging dimensions(with two inner packaging boxes): L*W*H=600*215*220mm

Long tube outer packaging dimensions(with three inner packaging boxes): L*W*H=600*215*325mm

- Note: 1. All specifications measured at $T_a=25^\circ\text{C}$, humidity<75%, nominal input voltage(12V) and rated output load unless otherwise specified.
2. Only typical models listed, other models may be different, please contact our technical person for more details.
3. In this datasheet, all the test methods of indications are based on corporate standards.