


DRD-3W Series

3W 2:1 Regulated Single & Dual output

Features

- Wide 2:1 Input Range
- Full SMD Technology
- 1500 VDC Isolation, Up to 3500 VDC
- Continuous Short Circuit Protection
- Efficiency up to 82%
- -40 ~ 85°C Operating Temperature
- Plastic Case Standard, Optional Metal Case



The DRD series is a family of cost effective 3W single & dual output DC-DC converters. These converters combine Plastic case in a 24-pin DIL package with high performance features such as 1500 VDC ~ 3500VDC input/output isolation voltage, continuous short circuit protection with automatic restart and tight line / load regulation. Devices are encapsulated using flame retardant resin. Input voltages of 5, 12, 24 and 48 with output voltage of 5, 7.2, 9, 12, 15, 18, 24, ± 5 , ± 7.2 , ± 9 , ± 12 , ± 15 , ± 18 and ± 24 Vdc. High performance features include high efficiency operation up to 82% and output voltage accuracy of $\pm 1\%$ maximum.

All specifications typical at Ta=25°C, nominal input voltage and full load unless otherwise specified

OUTPUT SPECIFICATIONS	
Voltage accuracy	$\pm 1\%$
Line regulation	$\pm 0.5\%$
Load regulation	$\pm 0.5\%$
Ripple & noise (20 MHz bandwidth)(1)	60mV pk-pk
Short circuit protection	Continuous
Temperature coefficient	$\pm 0.02\%/^{\circ}\text{C}$
Capacitor load(2)	See table

INPUT SPECIFICATIONS	
Voltage Range	See table
Max. Input Current	See table
No-Load Input Current	See table
Input Filter	PI Type
Input Reflected Ripple Current (3)	35mA pk-pk



GENERAL SPECIFICATIONS	
Efficiency	See table, typ.
I/O Isolation Voltage(3 sec)	
Input/Output	1500~3500Vdc
Metal Case/Input & Output	1000Vdc
I/O Isolation Capacitance	60 pF typ.
I/O Isolation Resistance	1000M Ohm
Switching Frequency	100~400kHz
Humidity	95% rel H
Reliability Calculated MTBF(MIL-HDBK-217 F)	>1Mhrs
Safety Standard : (designed to meet)	IEC 60950-1

PHYSICAL SPECIFICATIONS	
Case Material	Non-conductive Black Plastic(UL94V-0 rated)
	Nickel-coated Copper
Base Material	Non-conductive Black Plastic(UL94V-0 rated)
Pin Material	0.5mm Brass Solder-coated
Potting Material	Epoxy (UL94V-0 rated)
Weight	12.5g(Plastic Case)/15.0g (Metal Case)
Dimensions	1.25 "x0.8 "x0.4 "

ENVIRONMENT SPECIFICATIONS	
Operating Temperature	-40 °C~85 °C(See Derating Curve)
Maximum Case Temperature	100 °C
Storage Temperature	-40 °C~125 °C
Cooling	Nature Convection

ABSOLUTE MAXIMUM RATINGS (4)	
These are stress ratings. Exposure of devices to any of these conditions may adversely affect long-term reliability.	
Input Surge Voltage (100mS)	
5 Models	15 Vdc,max.
12 Models	24 Vdc,max.
24 Models	40 Vdc,max.
48 Models	80 Vdc,max.
Soldering Temperature (1.5mm from case 10 sec. max.)	260 °C max.

PART NUMBER STRUCTURE

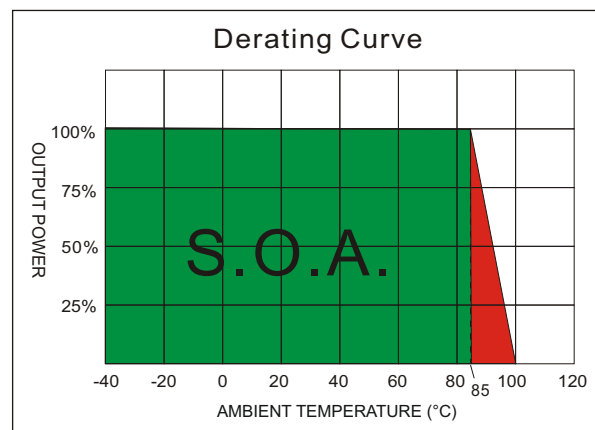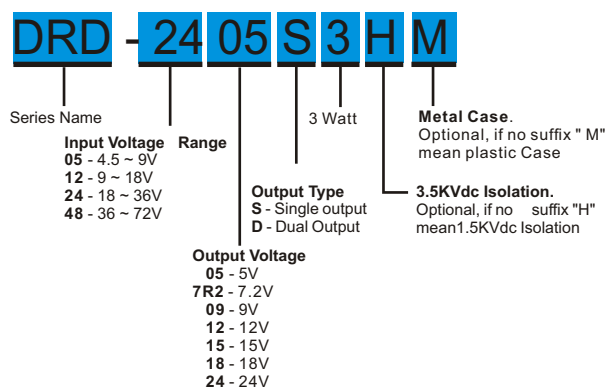

MODEL SELECTION GUIDE

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
DRD-0505S3	4.5-9	40	857	5	150	600	70	2200
DRD-057R2S3	4.5-9	40	833	7.2	104	417	72	1000
DRD-0509S3	4.5-9	40	833	9	83	333	72	470
DRD-0512S3	4.5-9	40	810	12	63	250	74	470
DRD-0515S3	4.5-9	40	810	15	50	200	74	470
DRD-0518S3	4.5-9	40	810	18	42	167	74	220
DRD-0524S3	4.5-9	40	857	24	31	125	70	220
DRD-0505D3	4.5-9	40	869	±5	±75	±300	69	±1000
DRD-057R2D3	4.5-9	40	896	±7.2	±52	±208	67	±220
DRD-0509D3	4.5-9	40	857	±9	±42	±167	70	±220
DRD-0512D3	4.5-9	40	833	±12	±31	±125	72	±220
DRD-0515D3	4.5-9	40	810	±15	±25	±100	74	±220
DRD-0518D3	4.5-9	40	810	±18	±21	±83	74	±220
DRD-0524D3	4.5-9	40	857	±24	±16	±63	70	±100
DRD-1205S3	9-18	20	328	5	150	600	76	2200
DRD-127R2S3	9-18	20	338	7.2	104	417	74	1000
DRD-1209S3	9-18	20	324	9	83	333	77	470
DRD-1212S3	9-18	20	316	12	63	250	79	470
DRD-1215S3	9-18	20	316	15	50	200	79	470
DRD-1218S3	9-18	20	316	18	42	167	79	220
DRD-1224S3	9-18	20	316	24	31	125	79	220
DRD-1205D3	9-18	20	329	±5	±75	±300	76	±1000
DRD-127R2D3	9-18	20	325	±7.2	±52	±208	77	±220
DRD-1209D3	9-18	20	325	±9	±42	±167	77	±220
DRD-1212D3	9-18	20	316	±12	±31	±125	79	±220
DRD-1215D3	9-18	20	316	±15	±25	±100	79	±220
DRD-1218D3	9-18	20	321	±18	±21	±83	78	±220
DRD-1224D3	9-18	20	316	±24	±16	±63	79	±100
DRD-2405S3	18-36	12	156	5	150	600	80	2200
DRD-247R2S3	18-36	12	162	7.2	104	417	77	1000

Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

MODEL NUMBER	INPUT Voltage Range (Vdc)	INPUT Current		OUTPUT Voltage (Vdc)	OUTPUT Current		EFFICIENCY @FL(%)	Capacitor Load(uF)
		No-Load (mA)	Full Load (mA)		Min. load (mA)	Full load (mA)		
DRD-2409S3	18-36	12	156	9	83	333	80	470
DRD-2412S3	18-36	12	152	12	62	250	82	470
DRD-2415S3	18-36	12	152	15	50	200	82	470
DRD-2418S3	18-36	12	158	18	42	167	79	220
DRD-2424S3	18-36	12	156	24	31	125	80	220
DRD-2405D3	18-36	12	156	±5	±75	±300	80	±1000
DRD-247R2D3	18-36	12	160	±7.2	±52	±208	78	±220
DRD-2409D3	18-36	12	158	±9	±42	±167	80	±220
DRD-2412D3	18-36	12	152	±12	±31	±125	82	±220
DRD-2415D3	18-36	12	152	±15	±25	±100	82	±220
DRD-2418D3	18-36	12	156	±18	±21	±83	80	±220
DRD-2424D3	18-36	12	156	±24	±16	±63	80	±100
DRD-4805S3	36-72	8	81	5	150	600	77	2200
DRD-487R2S3	36-72	8	80	7.2	104	417	78	1000
DRD-4809S3	36-72	8	80	9	83	333	78	470
DRD-4812S3	36-72	8	78	12	63	250	80	470
DRD-4815S3	36-72	8	78	15	50	200	80	470
DRD-4818S3	36-72	8	81	18	42	167	77	220
DRD-4824S3	36-72	8	78	24	31	125	80	220
DRD-4805D3	36-72	8	80	±5	±75	±300	78	±1000
DRD-487R2D3	36-72	8	80	±7.2	±52	±208	78	±220
DRD-4809D3	36-72	8	79	±9	±42	±167	79	±220
DRD-4812D3	36-72	8	78	±12	±31	±125	80	±220
DRD-4815D3	36-72	8	78	±15	±25	±100	80	±220
DRD-4818D3	36-72	8	80	±18	±21	±83	78	±220
DRD-4824D3	36-72	8	78	±24	±16	±63	80	±100


Suffix "H" means 3.5KVdc isolation

Suffix "M" means Metal Case instead of standard Plastic case

NOTE

1. Typical value at nominal input voltage and full load.
2. Test by nominal input voltage and constant resistor load.
3. Measured Input reflected ripple current with a simulated source inductance of 12uH.
4. Exceeding the absolute ratings of the unit could cause damage. It is not allowed for continuous operating.
5. Operation under no-load conditions will not damage these devices, however they may not meet all listed specifications.
6. It's necessary to add minimum capacitor in output for some models, please check single model datasheet for detail value.


MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

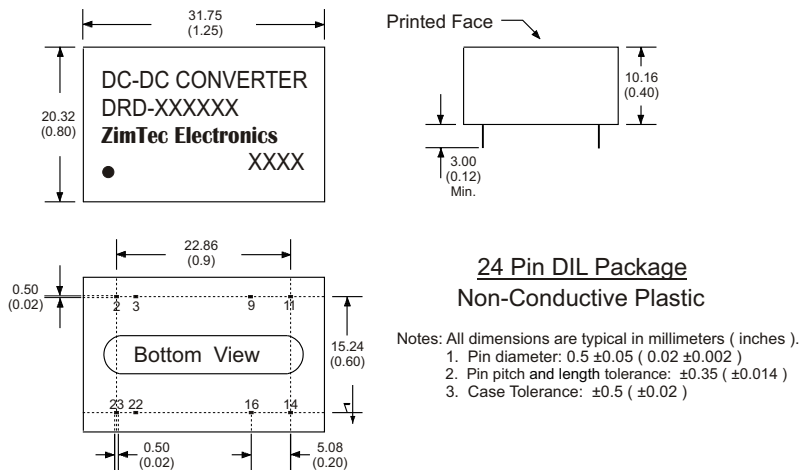

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)

MECHANICAL SPECIFICATIONS FOR HIGH ISOLATION MODEL

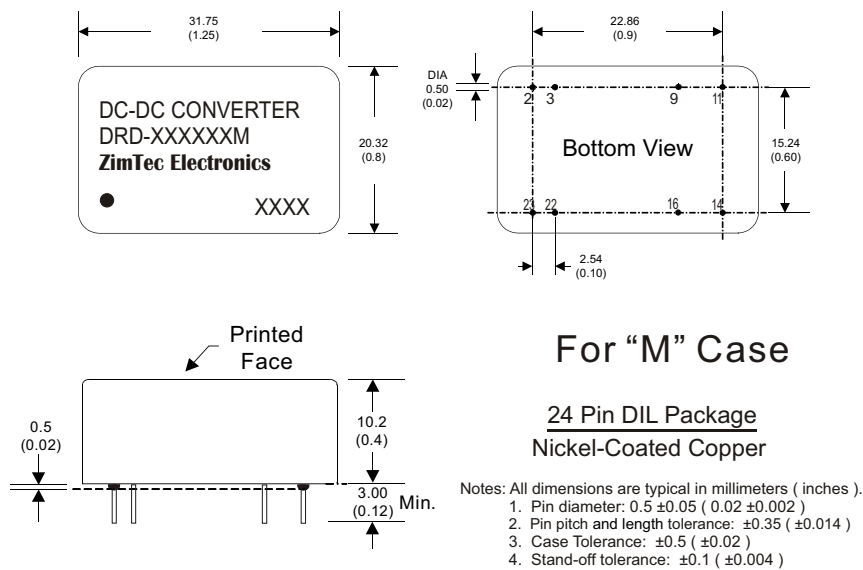

PIN CONNECTIONS		
PIN NUMBER	SINGLE	DUAL
2	-V Input	-V Input
3	-V Input	-V Input
9	N.P.	Common
11	N.C.	-V Output
14	+V Output	+V Output
16	-V Output	Common
22	+V Input	+V Input
23	+V Input	+V Input

(The Pin Connection of high isolation one is the same with normal one.)