

FEATURES


- Efficiency up to 86%
- Isolation voltage: 1.5K VDC
- Operating temperature range: -40 °C to +105 °C
- Miniature SMD package
- Internal surface mounted design
- No external component required
- International standard pin-out
- continuous short circuit protection

DBZ_XT2P Series

2W, Fixed input voltage, isolated & unregulated single output

DBZ_XT2P series is specially designed for applications where an isolated voltage is required in a distributed power supply system. It is suitable for

1. Where the voltage of the input power supply is stable (voltage variation: $\pm 10\%V_{in}$);
2. Where isolation is necessary between input and output (isolation voltage $\leq 1500VDC$);
3. Where do not has high requirement of line regulation, load regulation and the ripple & noise of the output voltage;
Such as: pure digital circuits, low frequency analog circuits, and relay-driven circuits.



Selection Guide

Part No.	Input Voltage (VDC)	Output		Efficiency (%,Min./Typ.) @ Full Load	Max. Capacitive Load (μF)
	Nominal (Range)	Output Voltage (VDC)	Output Current (mA) (Max./Min.)		
DBZ-0503-XT2P	5 (4.5-5.5)	3.3	400/40	68/72	220
DBZ-0505-XT2P		5	400/40	75/79	
DBZ-0509-XT2P		9	222/22	78/82	
DBZ-0512-XT2P		12	167/17	78/82	
DBZ-0515-XT2P		15	133/13	79/83	
DBZ-1205-XT2P	12 (10.8-13.2)	5	400/40	75/79	
DBZ-1209-XT2P		9	222/22	78/82	
DBZ-1212-XT2P		12	167/17	78/82	
DBZ-1215-XT2P		15	133/13	79/83	
DBZ-1224-XT2P		24	83/8	80/84	
DBZ-1515-XT2P	15 (13.5-16.5)	15	133/13	79/83	
DBZ-2405-XT2P	24 (21.6-26.4)	5	400/40	75/79	
DBZ-2412-XT2P		12	167/17	78/82	
DBZ-2415-XT2P		15	133/13	79/83	
DBZ-2424-XT2P		24	83/8	82/86	

Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Current (full load / no-load)	5V input	--	506/30	--	mA
	12V input	--	212/25	--	
	15V input	--	169/18	--	
	24V input	--	105/15	--	
Surge Voltage (1sec. max.)	5V input	-0.7	--	9	VDC
	12V input	-0.7	--	18	
Surge Voltage (1sec. max.)	15V input	-0.7	--	21	VDC
	24V input	-0.7	--	30	
Reflected Ripple Current		--	15	--	mA
Input Filter		Capacitor filter			

The information and specifications contained in this data sheet are believed to be correct at time of publication. However, ZimTec Electronics accepts no responsibility for consequences arising from printing errors or inaccuracies. Specifications are subject to change without notice. No rights under any patent accompany the sale of any such product(s) or information contained herein.

Output Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
Output Voltage Accuracy			See tolerance envelope graph (Fig. 1)			
Line Regulation	Input voltage change: $\pm 1\%$	3.3VDC output	--	--	± 1.5	--
		Other output	--	--	± 1.2	
Load Regulation	10%-100% load	3.3VDC output	--	18	--	%
		5VDC output	--	12	--	
		9VDC output	--	9	--	
		12VDC output	--	8	--	
		15VDC output	--	7	--	
		24VDC output	--	6	--	
Ripple & Noise*	20MHz bandwidth		--	100	--	mVp-p
Temperature Drift Coefficient	100% load		--	--	± 0.03	%/°C
Output Short Circuit Protection**	5/12/15VDC input		Continuous, self-recovery			
	24VDC input		--	--	1	s

Notes:
 * Ripple and noise tested with "parallel cable" method, please see *DC-DC Converter Application Notes* for specific operation methods.
 **For the products of 24V Input voltage, supply voltage must be discontinued at the end of short circuit duration.

General Specifications

Item	Operating Conditions		Min.	Typ.	Max.	Unit
IsolationVoltage	Input-output, with the test time of 1 minute and the leak current lower than 1mA		1500	--	--	VDC
Isolation Resistance	Input-output, isolation voltage 500VDC		1000	--	--	MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		--	20	--	pF
Operating Temperature	3.3V/5V output	Derating if the temperature ≥71°C, (see Fig. 2)	-40	--	105	°C
	Other output	Derating if the temperature ≥85°C, (see Fig. 2)				
Storage Temperature			-55	--	125	
Casing Temperature Rise	Ta=25°C		--	25	—	
PinWelding Resistance Temperature	Welding spot is 1.5mm away fromthe casing, 10 seconds		--	--	300	
Reflow Soldering Temperature			Peak temp. ≤245°C, maximum duration time≤60s at 217°C. For actual application, please refer to IPC/JEDECJ-STD-020D.1.			
Storage Humidity	Non-condensing		--	--	95	%
Switching Frequency	100% load, nominal input voltage		--	100	300	KHz
MTBF	MIL-HDFK-217F@25		3500	--	--	K hours

Physical Specifications

Casing Material	Black flame-retardant heat-proof epoxy resin (UL94-V0)
Package Dimensions	12.70*11.20*7.25 mm
Weight	1.5g (Typ.)
Cooling Method	Free air convection

EMC Specifications

EMI	Conducted disturbance	CISPR22/EN55022 CLASS B (see Fig. 4 for recommended circuit)
	Radiated emission	CISPR22/EN55022 CLASS B (see Fig. 4 for recommended circuit)
EMS	Electrostatic discharge	IEC/EN61000-4-2 Contact $\pm 6\text{KV}$ perf. Criteria B

Product Characteristic Curve

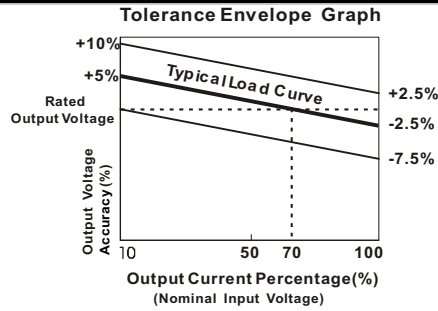


Fig. 1





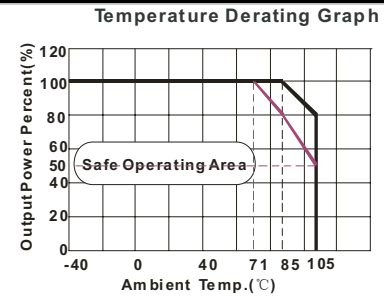



Fig. 2

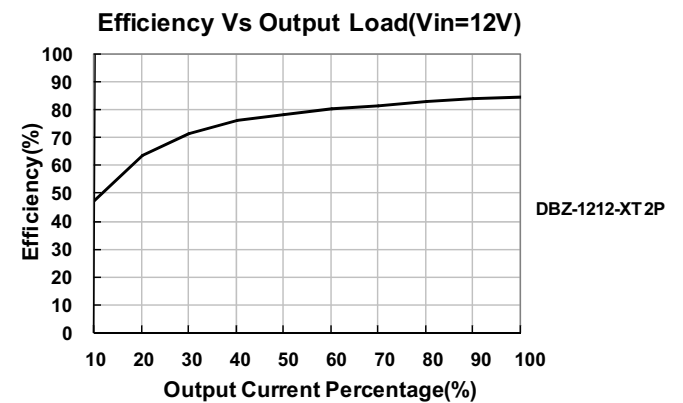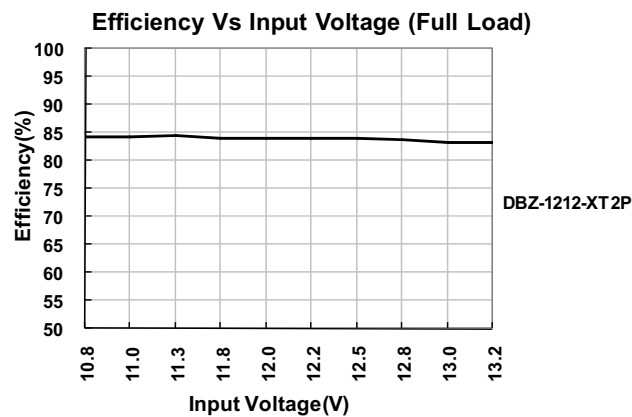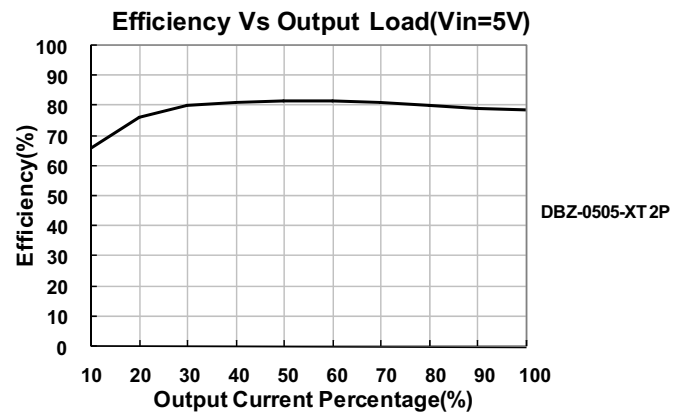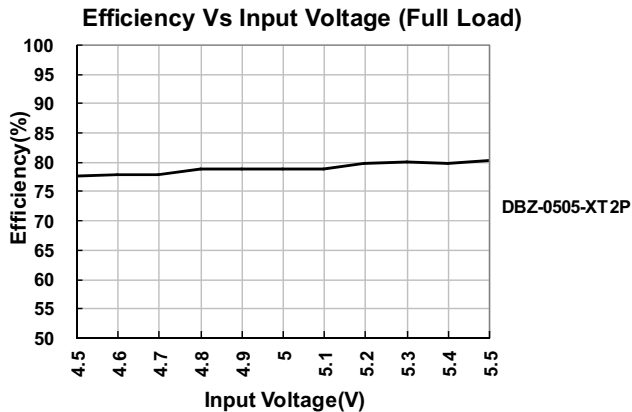

Design Reference

1. Typical application

If it is required to further reduce input and output ripple, a filter capacitor can be connected to the input and output terminals, see Fig.3. Moreover, choosing suitable filter capacitor is very important, start-up problems may be caused by too large capacitance. To ensure the modules running well, the recommended capacitive load values as shown in Table 1.

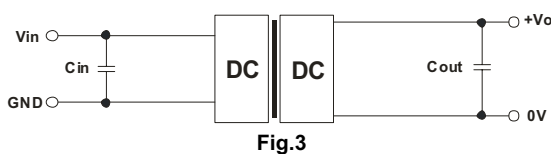

Recommended capacitive load value table (Table 1)

Vin (VDC)	Cin (μF)	Vo (VDC)	Cout (μF)
5	4.7	3.3	10
12	2.2	5	10
15	2.2	9	4.7
24	1	12	2.2
--	--	15	1
--	--	24	0.47

It is not recommended to connect any external capacitor when output power is less than 0.5W.

2. EMC typical recommended circuit

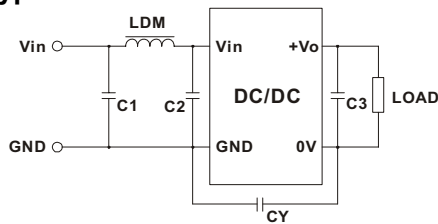


Fig. 4

Input voltage (VDC)		5/12/15/24
EMI	C1	4.7μF /50V
	C2	4.7μF /50V
	C3	Refer to the Cout in Fig.3
	CY	--
	LDM	6.8μH


Notes: 1. DBZ2424-XT2P is subject to CY (CY : 470pF/2KV).

2. It is not needed to add the component in the peripheral circuit when parameter with the symbol of "--".

3. Output load requirements

To ensure the module work efficiently and reliably, during the operation, the min. output load should be no less than 10% of the full load. If the actual output power is low, please connect a resistor to the output terminal in parallel, with a recommended resistance which is 10% of the rated power, and derating is required during operation.

Dimensions and Recommended Layout

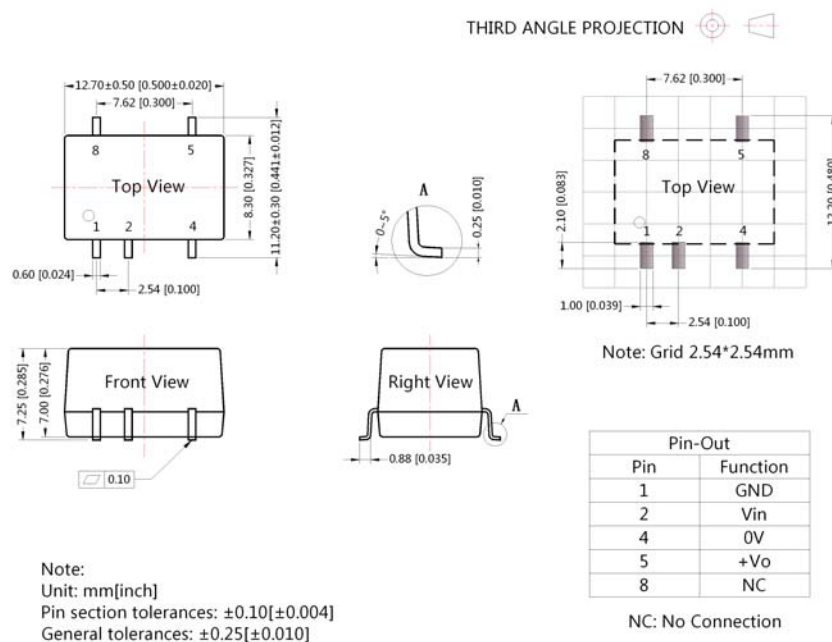

Notes:

1. Packing Information please refer to 'Product Packing Information'. Packing bag number: 58210023;
2. If the product is operated under the min. required load, the product performance cannot be guaranteed to comply with all performance indexes in this datasheet;
3. The max. capacitive load should be tested within the input voltage range and under full load conditions;
4. Unless otherwise specified, data in this datasheet should be tested under the conditions of Ta=25 °C, humidity<75% when inputting nominal voltage and outputting rated load;
5. All index testing methods in this datasheet are based on our Company's corporate standards;
6. The performance indexes of the product models listed in this manual are as above, but some indexes of non-standard model products will exceed the above-mentioned requirements, and please directly contact our technicians for specific information;
7. We can provide product customization service;
8. Specifications of this product are subject to changes without prior notice.